

OpenTelemetry


Distributed Tracing GoogleTracingNetflixOpenTracingGoogleOpenCensusOpenTelemetry

1. [OpenTracing](#)
2. [OpenTelemetry](#)

TracingOpenTelemetryGolang


1. <https://github.com/open-telemetry/opentelemetry-go>
2. <https://github.com/open-telemetry/opentelemetry-go-contrib>

Jaeger/Prometheus/GrafanaOpenTelemetry

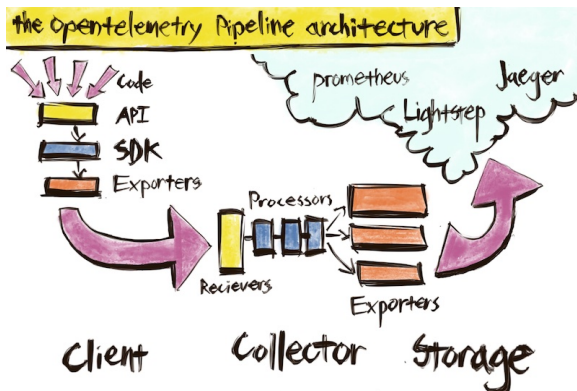

Content Menu	
•	OpenTelemetry
•	• TracerProvider
	• Tracer
	• Span
	• Attributes
	• Events
	• SpanContext
	• Propagator
•	• Http Client
	• Http Server
	• gRPC Client
	• gRPC Server
	• Logging
	• Orm
	• Redis
	• Utils
•	
•	

OpenTelemetryOpenTelemetry [OpenTelemetry https://github.com/open-telemetry/opentelemetry-specification/blob/main/specification/trace/api.md](https://github.com/open-telemetry/opentelemetry-specification/blob/main/specification/trace/api.md)

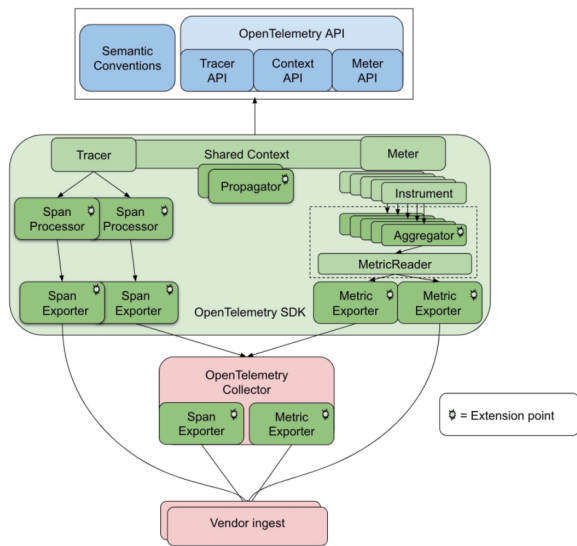

TracerProvider

TracerTracerProvider (NoopTracerProvider)Tracer jaegerjaegerTracerProvider

```



// InitJaeger initializes and registers jaeger to global TracerProvider.
//
// The output parameter `tp` is used for waiting exported trace spans to
// be uploaded,
// which is useful if your program is ending and you do not want to lose
// recent spans.
func InitJaeger(serviceName, endpoint string) (tp *trace.TracerProvider,
err error) {
    var endpointOption jaeger.EndpointOption
    if strings.HasPrefix(endpoint, "http") {
        // HTTP.
        endpointOption = jaeger.WithCollectorEndpoint(jaeger.
WithEndpoint(endpoint))
    } else {
        // UDP.
        endpointOption = jaeger.WithAgentEndpoint(jaeger.
WithAgentHost(endpoint))
    }

    // Create the Jaeger exporter
    exp, err := jaeger.New(endpointOption)
    if err != nil {
        return nil, err
    }
    tp = trace.NewTracerProvider(
        // Always be sure to batch in production.
        trace.WithBatcher(exp),
        // Record information about this application in an
Resource.
        trace.WithResource(resource.NewWithAttributes(
            semconv.SchemaURL,
            semconv.ServiceNameKey.String(serviceName),
        )),
    )
    otel.SetTracerProvider(tp)
    return tp, nil
}

```

Tracer

Tracertracerspan8spantracer:

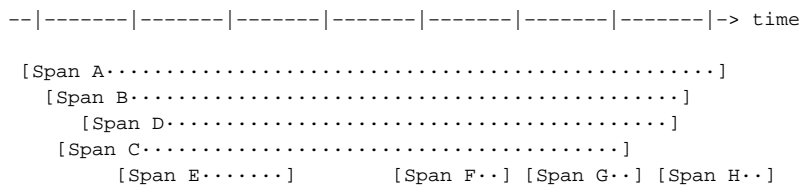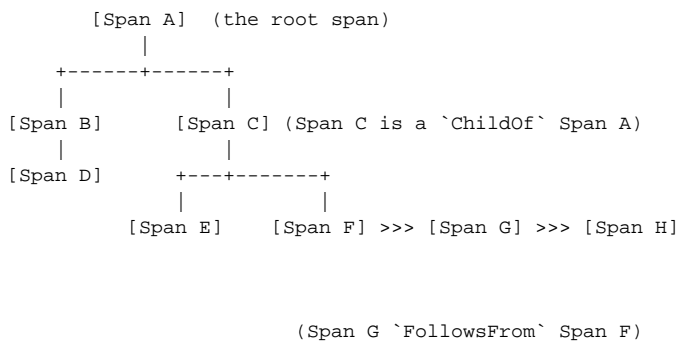

Tracer

```
otel.Tracer(tracerName)
//
otel.GetTracerProvider().Tracer(tracerName)
//
gtrace.NewTracer(tracerName)
```

Span

Span span http span:

- operation name
-
- K/V Tags
- K/V Logs
- SpanContext

SpanSpan

```
otel.Tracer().Start(ctx, spanName, opts ...)
//
otel.Tracer(tracerName).Start(ctx, spanName, opts ...)
//
gtrace.NewSpan(ctx, spanName, opts...)
```

Attributes

Attributes K/V http.method="GET", http.status_code=200 keyvalue spanAttributes spanContext span Attributes

```
span.SetAttributes(
    label.String("http.remote", conn.RemoteAddr().String()),
    label.String("http.local", conn.LocalAddr().String()),
)
```

Events

Events Attributes K/V Attributes Events Events Events Events keyvalue

```
span.AddEvent("http.request", trace.WithAttributes(
    label.Any("http.request.header", headers),
    label.Any("http.request.baggage", gtrace.GetBaggageMap(ctx)),
    label.String("http.request.body", bodyContent),
))
```

SpanContext

SpanContext

- span_id, trace_id
- Baggage - K/V Baggage Attributes K/V Attributes
 - keyvalue
 - Baggage span SpanContext span Baggage - span K, V CPU

Propagator

Propagator/Client Server TraceId SpanId Baggage Propagator/OpenTelemetry TextMap Propagator TextMap Propagator <https://github.com/open-telemetry/opentelemetry-specification/blob/main/specification/context/api-propagators.md>

GoFramegtraceOpenTelemetry

```
// defaultTextMapPropagator is the default propagator for context
propagation between peers.
defaultTextMapPropagator = propagation.NewCompositeTextMapPropagator(
    propagation.TraceContext{},
    propagation.Baggage{},
)
```

TracingGoFrameOpenTelemetryGo APIOpenTelemetryGo APITracerProviderGoFrameTracingTracingTracingTracingHTTP/gRPC

Http Client


HTTPTracing

HTTP

```
// MiddlewareClientTracing is a client middleware that enables tracing
feature using standards of OpenTelemetry.
func MiddlewareClientTracing(c *Client, r *http.Request) (*ClientResponse,
error)
```

Use

```
client := g.Client().Use(ghttp.MiddlewareClientTracing)
```

 HTTP ClientTracing


Http Server

HTTP/Tracing

```
// MiddlewareServerTracing is a server middleware that enables tracing
feature using standards of OpenTelemetry.
func MiddlewareServerTracing(r *Request)
```

Use

```
s := g.Server()
s.Group("/", func(group *ghttp.RouterGroup) {
    group.Middleware(ghttp.MiddlewareServerTracing)
    // ...
})
```

 HTTP ServerTracing

gRPC Client

gRPCUnaryStreamKatyushagRPCTracing

```
// UnaryTracing is an unary interceptor for adding tracing feature for
gRPC client using OpenTelemetry.
func (c *krpcClient) UnaryTracing(ctx context.Context, method string, req,
reply interface{}, cc *grpc.ClientConn, invoker grpc.UnaryInvoker, opts ...
grpc.CallOption) error

// StreamTracing is a stream interceptor for adding tracing feature for
gRPC client using OpenTelemetry.
func (c *krpcClient) StreamTracing(ctx context.Context, desc *grpc.
StreamDesc, cc *grpc.ClientConn, method string, streamer grpc.
Streamer, callOpts ...grpc.CallOption) (grpc.ClientStream, error)
```

```
grpcClientOptions := make([]grpc.DialOption, 0)
grpcClientOptions = append(
    grpcClientOptions,
    grpc.WithInsecure(),
    grpc.WithBlock(),
    grpc.WithChainUnaryInterceptor(
        krpc.Client.UnaryTracing,
    ),
)

conn, err := grpc.Dial(":8000", grpcClientOptions...)
// ...
```

gRPC Server

gRPCUnaryStreamKatyushagRPCTracing

```
// UnaryTracing is an unary interceptor for adding tracing feature for
gRPC server using OpenTelemetry.
func (s *krpcServer) UnaryTracing(ctx context.Context, req interface{},
info *grpc.UnaryServerInfo, handler grpc.UnaryHandler) (interface{},
error)

// StreamTracing is a stream unary interceptor for adding tracing feature
for gRPC server using OpenTelemetry.
func (s *krpcServer) StreamTracing(srv interface{}, ss grpc.ServerStream,
info *grpc.StreamServerInfo, handler grpc.StreamHandler) error
```

```
s := grpc.NewServer(
    grpc.ChainUnaryInterceptor(
        krpc.Server.UnaryTracing,
    ),
)
```

Logging

TraceIdTracingTracingTraceIdglogCtxcontext.Contextcontext.ContextTraceId

Orm

OrmTracingTracing

Redis

RedisRedisTracingTracing

Utils

Tracinggtrace<https://godoc.org/github.com/gogf/gf/net/gtrace>

- -
- -HTTP
- -GRPC

- <https://opentracing.io>
- <https://opencensus.io>
- <https://opentelemetry.io>
- <https://github.com/open-telemetry/opentelemetry-specification/tree/main/specification>