

goframegoframev1.10.0

[INTE]


```
2021-04-14 15:24:52.954 [INTE] gdb_driver_mysql.go:49 Open: root:
12345678@tcp(127.0.0.1:3306)/test
2021-04-14 15:24:52.954 [INTE] gdb.go:492 open new connection success,
master:false, config:&gdb.ConfigNode{Host:"", Port:"", User:"", Pass:"",
Name:"", Type:"mysql", Role:"", Debug:false, Prefix:"", DryRun:false,
Weight:0, Charset:"", LinkInfo:"root:12345678@tcp(127.0.0.1:3306)/test",
MaxIdleConnCount:0, MaxOpenConnCount:0, MaxConnLifeTime:0, QueryTimeout:0,
ExecTimeout:0, TranTimeout:0, PrepareTimeout:0, CreatedAt:"",
UpdatedAt:"", DeletedAt:"", TimeMaintainDisabled:false}, node:&gdb.
ConfigNode{Host:"", Port:"", User:"", Pass:"", Name:"", Type:"mysql",
Role:"", Debug:false, Prefix:"", DryRun:false, Weight:0, Charset:"utf8",
LinkInfo:"root:12345678@tcp(127.0.0.1:3306)/test", MaxIdleConnCount:0,
MaxOpenConnCount:0, MaxConnLifeTime:0, QueryTimeout:0, ExecTimeout:0,
TranTimeout:0, PrepareTimeout:0, CreatedAt:"", UpdatedAt:"", DeletedAt:"",
TimeMaintainDisabled:false}
```

1. - gf.debug=true
2. - GF_DEBUG=true
3. GoFrame v1.14.0bootg.SetDebug/


✅ goframe+




GoLand IDEGF_DEBUG

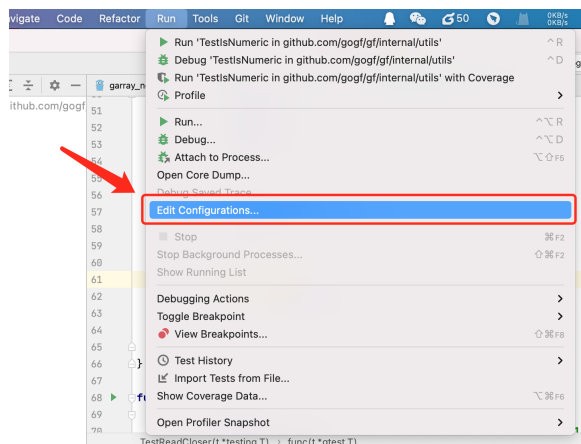

Content Menu



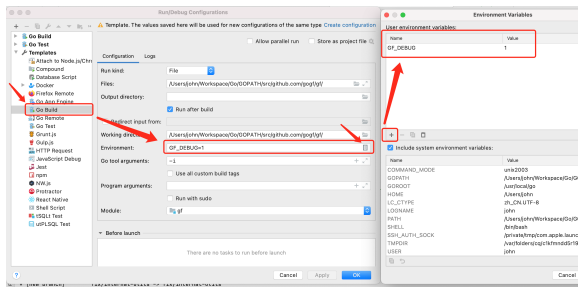

--gf.debug=true

```
$ ./app --gf.debug=true
```

```
$ ./app --gf.debug true
```

```
$ ./app --gf.debug=1
```

```
$ ./app --gf.debug 1
```

